



**OKROGLA VODILA  
ROUND GUIDES**  
3.010.0



**VZDOLŽNE PODPORE OKROGLIH VODIL  
LINEAR SUPORT GUIDES**  
3.020.0



**LINEARNI KROGLJIČNI LEŽAJI  
LINEAR BEARINGS**  
3.030.0



**LINEARNI LEŽAJI V OHIŠJU  
CASE BEARINGS**  
3.050.0




**ALUMINIJASTA OKROGLA VODILA  
ALUMINIUM ROUND GUIDES**  
3.070.0



**LINEARNI DRSNI LEŽAJI  
LINEAR GLIDE BEARINGS**  
3.075.0

## KOMPAKTNE KROGLIČNE PUŠE TIP KH / COMPACT LINEAR BEARINGS TYPE KH

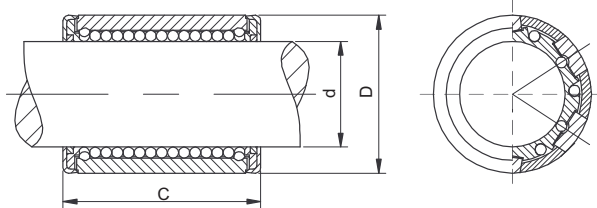


| TIP/TYPE<br>standarna oblika z<br>dvema dvojnimi<br>tesnili / standard<br>design with 2 double<br>lip seals | PREMER VODILA d (mm)<br>SHAFT DIAMETER d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / BEARING DIMENSIONS LINEAR (mm) |    |    | NOSILNOST / LOAD CAPACITY (N) |         |
|-------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------|-------------------------------------------------|----|----|-------------------------------|---------|
|                                                                                                             |                                               |                        | d                                               | D  | C  | Dyn. C                        | Sta. C0 |
| KH 1228-PP                                                                                                  | 12                                            | 16                     | 12                                              | 19 | 28 | 620                           | 510     |
| KH 1630-PP                                                                                                  | 16                                            | 25                     | 16                                              | 24 | 30 | 800                           | 620     |
| KH 2030-PP                                                                                                  | 20                                            | 28                     | 20                                              | 28 | 30 | 950                           | 790     |
| KH 2540-PP                                                                                                  | 25                                            | 58                     | 25                                              | 35 | 40 | 1990                          | 1670    |
| KH 3050-PP                                                                                                  | 30                                            | 80                     | 30                                              | 40 | 50 | 2800                          | 2700    |
| KH 4060-PP                                                                                                  | 40                                            | 140                    | 40                                              | 52 | 60 | 4400                          | 4450    |
| KH 5070-PP                                                                                                  | 50                                            | 170                    | 50                                              | 62 | 70 | 5680                          | 7180    |



- večje dimenzije po naročilu  
- larger sizes on request

## KOMPAKTNE KROGLIČNE PUŠE TIP SBE / COMPACT LINEAR BEARINGS TYPE SBE

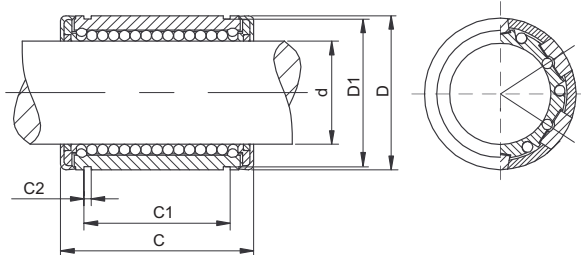


| TIP<br>TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals | PREMER VODILA d (mm)<br>DIAMETER d (mm) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |     |      |      |      | NOSILNOST / LOAD CAPACITY (N) |         |
|--------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------|-----|------|------|------|-------------------------------|---------|
|                                                                    |                                         | D                                               | C   | C1   | C2   | D1   | Dyn. C                        | Sta. C0 |
| SBE 16-UU                                                          | 16                                      | 26                                              | 36  | 24,6 | 1,3  | 24,9 | 1176                          | 607     |
| SBE 20-UU                                                          | 20                                      | 32                                              | 45  | 31,2 | 1,6  | 30,5 | 2352                          | 1254    |
| SBE 25-UU                                                          | 25                                      | 40                                              | 58  | 43,7 | 1,85 | 38,5 | 4508                          | 2195    |
| SBE 30-UU                                                          | 30                                      | 47                                              | 68  | 51,7 | 1,85 | 44,5 | 5586                          | 2959    |
| SBE 40-UU                                                          | 40                                      | 62                                              | 80  | 60,3 | 2,15 | 58,5 | 9310                          | 4312    |
| SBE 50-UU                                                          | 50                                      | 75                                              | 100 | 77,3 | 2,65 | 71,5 | 13720                         | 6762    |




- večje dimenzije po naročilu  
- larger sizes on request

## KOMPAKTNE KROGLIČNE PUŠE TIP SBEO / COMPACT LINEAR BEARINGS TYPE SBEO

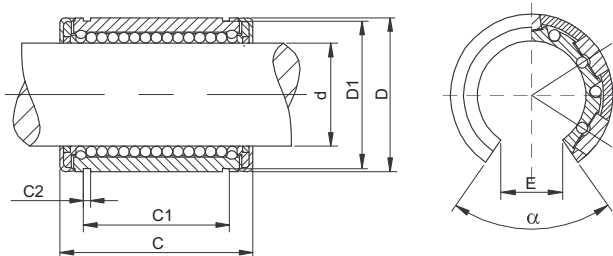


| TIP<br>TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals | PREMER VODILA d (mm)<br>DIAMETER d (mm) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |     |      |      |      |      | KOT<br>ANGLE<br>α | NOSILNOST / LOAD CAPACITY (N) |         |
|--------------------------------------------------------------------|-----------------------------------------|-------------------------------------------------|-----|------|------|------|------|-------------------|-------------------------------|---------|
|                                                                    |                                         | D                                               | C   | C1   | C2   | E    | D1   |                   | Dyn. C                        | Sta. C0 |
| SBEO 16-UU                                                         | 16                                      | 26                                              | 36  | 24,6 | 1,3  | 9    | 24,9 | 68°               | 1332                          | 715     |
| SBEO 20-UU                                                         | 20                                      | 32                                              | 45  | 31,2 | 1,6  | 9    | 30,5 | 55°               | 2371                          | 1276    |
| SBEO 25-UU                                                         | 25                                      | 40                                              | 58  | 43,7 | 1,85 | 11,5 | 38,5 | 57°               | 4557                          | 2234    |
| SBEO 30-UU                                                         | 30                                      | 47                                              | 68  | 51,7 | 1,85 | 14,0 | 44,5 | 57°               | 5644                          | 3018    |
| SBEO 40-UU                                                         | 40                                      | 62                                              | 80  | 60,3 | 2,15 | 19,5 | 58,5 | 56°               | 9398                          | 4410    |
| SBEO 50-UU                                                         | 50                                      | 75                                              | 100 | 77,3 | 2,65 | 22,5 | 71,5 | 54°               | 13857                         | 6860    |

## LINEARNI KROGLJIČNI LEŽAJ KH / LINEAR BEARINGS TYPE KH

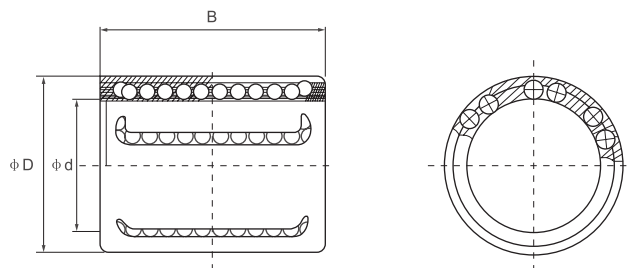


| TIP<br>TYPE<br><small>z dvema dvojnimi tesnili<br/>with 2 double lip seals</small> | PREMER VODILA d (mm)<br>DIAMETER d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |    | NOSILNOST / LOAD CAPACITY (N) |         |
|------------------------------------------------------------------------------------|-----------------------------------------|------------------------|-------------------------------------------------|----|-------------------------------|---------|
|                                                                                    |                                         |                        | D                                               | B  | Dyn. C                        | Sta. C0 |
| KH 0622-PP ECO                                                                     | 6                                       | 7                      | 12                                              | 22 | 400                           | 239     |
| KH 0824-PP ECO                                                                     | 8                                       | 12                     | 15                                              | 24 | 435                           | 280     |
| KH 1026-PP ECO                                                                     | 10                                      | 14,5                   | 17                                              | 26 | 500                           | 370     |
| KH 1228-PP ECO                                                                     | 12                                      | 18,5                   | 19                                              | 28 | 620                           | 510     |
| KH 1428-PP ECO                                                                     | 14                                      | 20,5                   | 21                                              | 28 | 620                           | 520     |
| KH 1630-PP ECO                                                                     | 16                                      | 27,5                   | 24                                              | 30 | 800                           | 620     |
| KH 2030-PP ECO                                                                     | 20                                      | 32,5                   | 28                                              | 30 | 950                           | 790     |
| KH 2540-PP ECO                                                                     | 25                                      | 66,0                   | 35                                              | 40 | 1990                          | 1670    |
| KH 3050-PP ECO                                                                     | 30                                      | 95,0                   | 40                                              | 50 | 2800                          | 2700    |
| KH 4060-PP ECO                                                                     | 40                                      | 182                    | 52                                              | 60 | 4400                          | 4450    |
| KH 5070-PP ECO                                                                     | 50                                      | 252                    | 62                                              | 70 | 5500                          | 6300    |

## LINEARNI KROGLJIČNI LEŽAJI TIP LME / LINEAR BEARINGS TYPE LME

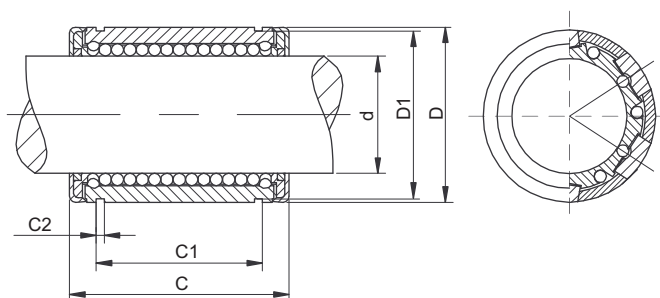



| TIP / TYPE<br><small>z dvema dvojnimi tesnili<br/>with 2 double lip seals<br/>POM kletka<br/>POM cage</small> | PREMER VODILA d (mm)<br>SHAFT DIAMETER d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / BEARING DIMENSIONS LINEAR (mm) |      |                                 |                                   |      | NOSILNOST / LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------|-------------------------------------------------|------|---------------------------------|-----------------------------------|------|-------------------------------|---------|
|                                                                                                               |                                               |                        | D                                               | D1   | C                               | C1                                | C2   | Dyn. C                        | Sta. C0 |
| LME 8-UU                                                                                                      | 8                                             | 20                     | 16 <sup>0,000<br/>-0,006</sup>                  | 15,2 | 25 <sup>0,000<br/>-0,200</sup>  | 16,5 <sup>0,000<br/>-0,200</sup>  | 1,1  | 25                            | 400     |
| LME 10-UU                                                                                                     | 10                                            | 29,5                   | 19 <sup>0,000<br/>-0,009</sup>                  | 21   | 29 <sup>0,000<br/>-0,200</sup>  | 22,0 <sup>0,000<br/>-0,200</sup>  | 1,3  | 372                           | 549     |
| LME 12-UU                                                                                                     | 12                                            | 41,0                   | 22 <sup>0,000<br/>-0,009</sup>                  | 18   | 32 <sup>0,000<br/>-0,200</sup>  | 22,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 510                           | 784     |
| LME 16-UU                                                                                                     | 16                                            | 57,0                   | 26 <sup>0,000<br/>-0,009</sup>                  | 24,9 | 36 <sup>0,000<br/>-0,200</sup>  | 24,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 578                           | 892     |
| LME 20-UU                                                                                                     | 20                                            | 91,0                   | 32 <sup>0,000<br/>-0,011</sup>                  | 30,3 | 45 <sup>0,000<br/>-0,200</sup>  | 31,5 <sup>0,000<br/>-0,200</sup>  | 1,6  | 862                           | 1370    |
| LME 25-UU                                                                                                     | 25                                            | 215                    | 40 <sup>0,000<br/>-0,011</sup>                  | 37,5 | 58 <sup>0,000<br/>-0,300</sup>  | 44,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 980                           | 1570    |
| LME 30-UU                                                                                                     | 30                                            | 325                    | 47 <sup>0,000<br/>-0,011</sup>                  | 44,5 | 68 <sup>0,000<br/>-0,300</sup>  | 52,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 1570                          | 2740    |
| LME 40-UU                                                                                                     | 40                                            | 705                    | 62 <sup>0,000<br/>-0,013</sup>                  | 59   | 80 <sup>0,000<br/>-0,300</sup>  | 60,6 <sup>0,000<br/>-0,300</sup>  | 2,15 | 2160                          | 4020    |
| LME 50-UU                                                                                                     | 50                                            | 1130                   | 75 <sup>0,000<br/>-0,013</sup>                  | 72   | 100 <sup>0,000<br/>-0,400</sup> | 77,6 <sup>0,000<br/>-0,400</sup>  | 2,65 | 3820                          | 7940    |
| LME 60-UU                                                                                                     | 60                                            | 2000                   | 90 <sup>0,000<br/>-0,015</sup>                  | 86,5 | 125 <sup>0,000<br/>-0,400</sup> | 101,7 <sup>0,000<br/>-0,400</sup> | 3,15 | 4700                          | 9800    |

## KOMPAKTNE KROGLIČNE PUŠE TIP LME-AJ / COMPACT LINEAR BEARINGS TYPE LME-AJ



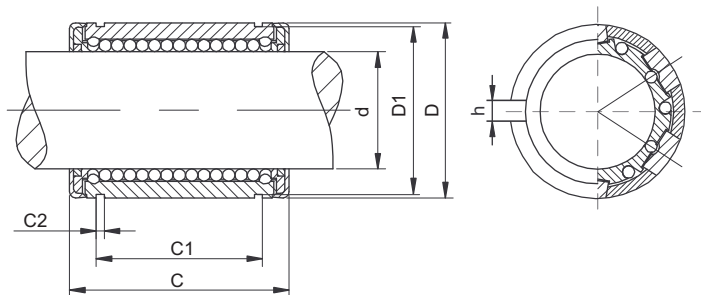


| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | PREMER VODILA d (mm)<br>SHAFT DIAMETER d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |      |                                 |                                   |      |     |  | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------|-------------------------------------------------|------|---------------------------------|-----------------------------------|------|-----|--|------------------------------------|---------|
|                                                                                             |                                               |                        | D                                               | D1   | C                               | C1                                | C2   | h   |  | Dyn. C                             | Sta. C0 |
| LME 8AJ-UU                                                                                  | 8                                             | 19                     | 16 <sup>0,000<br/>-0,008</sup>                  | 15,2 | 25 <sup>0,000<br/>-0,200</sup>  | 16,5 <sup>0,000<br/>-0,200</sup>  | 1,1  | 1   |  | 265                                | 402     |
| LME 10AJ-UU                                                                                 | 10                                            | 29                     | 19 <sup>0,000<br/>-0,009</sup>                  | 18,0 | 29 <sup>0,000<br/>-0,200</sup>  | 22,0 <sup>0,000<br/>-0,200</sup>  | 1,3  | 1   |  | 372                                | 549     |
| LME 12AJ-UU                                                                                 | 12                                            | 40                     | 22 <sup>0,000<br/>-0,009</sup>                  | 21,0 | 32 <sup>0,000<br/>-0,200</sup>  | 22,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 1,5 |  | 510                                | 784     |
| LME 16AJ-UU                                                                                 | 16                                            | 56                     | 26 <sup>0,000<br/>-0,009</sup>                  | 24,9 | 36 <sup>0,000<br/>-0,200</sup>  | 24,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 1,5 |  | 578                                | 892     |
| LME 20AJ-UU                                                                                 | 20                                            | 90                     | 32 <sup>0,000<br/>-0,011</sup>                  | 30,3 | 45 <sup>0,000<br/>-0,200</sup>  | 31,5 <sup>0,000<br/>-0,200</sup>  | 1,6  | 2   |  | 862                                | 1370    |
| LME 25AJ-UU                                                                                 | 25                                            | 212                    | 40 <sup>0,000<br/>-0,011</sup>                  | 37,5 | 58 <sup>0,000<br/>-0,300</sup>  | 44,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 2   |  | 980                                | 1570    |
| LME 30AJ-UU                                                                                 | 30                                            | 320                    | 47 <sup>0,000<br/>-0,013</sup>                  | 44,5 | 68 <sup>0,000<br/>-0,300</sup>  | 52,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 2   |  | 1570                               | 2740    |
| LME 40AJ-UU                                                                                 | 40                                            | 694                    | 62 <sup>0,000<br/>-0,013</sup>                  | 59,0 | 80 <sup>0,000<br/>-0,300</sup>  | 60,6 <sup>0,000<br/>-0,300</sup>  | 2,15 | 3   |  | 2160                               | 4020    |
| LME 50AJ-UU                                                                                 | 50                                            | 1110                   | 75 <sup>0,000<br/>-0,013</sup>                  | 72,0 | 100 <sup>0,000<br/>-0,300</sup> | 77,6 <sup>0,000<br/>-0,300</sup>  | 2,65 | 3   |  | 3820                               | 7940    |
| LME 60AJ-UU                                                                                 | 60                                            | 2050                   | 90 <sup>0,000<br/>-0,015</sup>                  | 86,5 | 125 <sup>0,000<br/>-0,400</sup> | 101,7 <sup>0,000<br/>-0,400</sup> | 3,15 | 3   |  | 4700                               | 9800    |




## KOMPAKTNE KROGLIČNE PUŠE TIP LME-OP / COMPACT LINEAR BEARINGS TYPE LME-OP

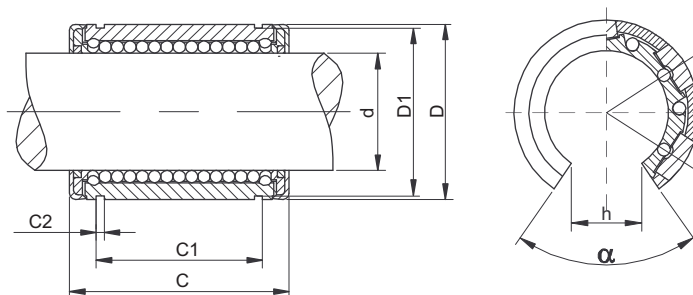

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | PREMER VODILA d (mm)<br>SHAFT DIAMETER d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |      |                                 |                                   |      |      |     | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------|-------------------------------------------------|------|---------------------------------|-----------------------------------|------|------|-----|------------------------------------|---------|
|                                                                                             |                                               |                        | D                                               | D1   | C                               | C1                                | C2   | h    | α   | Dyn. C                             | Sta. C0 |
| LME 12OP-UU                                                                                 | 12                                            | 32                     | 22 <sup>0,000<br/>-0,009</sup>                  | 21   | 32 <sup>0,000<br/>-0,200</sup>  | 22,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 7,5  | 78° | 510                                | 784     |
| LME 16OP-UU                                                                                 | 16                                            | 44                     | 26 <sup>0,000<br/>-0,009</sup>                  | 24,9 | 36 <sup>0,000<br/>-0,200</sup>  | 24,9 <sup>0,000<br/>-0,200</sup>  | 1,3  | 10   | 78° | 578                                | 892     |
| LME 20OP-UU                                                                                 | 20                                            | 75                     | 32 <sup>0,000<br/>-0,011</sup>                  | 30,3 | 45 <sup>0,000<br/>-0,200</sup>  | 31,5 <sup>0,000<br/>-0,200</sup>  | 1,6  | 10   | 60° | 862                                | 1370    |
| LME 25OP-UU                                                                                 | 25                                            | 181                    | 40 <sup>0,000<br/>-0,011</sup>                  | 37,5 | 58 <sup>0,000<br/>-0,300</sup>  | 44,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 12,5 | 60° | 980                                | 1570    |
| LME 30OP-UU                                                                                 | 30                                            | 272                    | 47 <sup>0,000<br/>-0,011</sup>                  | 44,5 | 68 <sup>0,000<br/>-0,300</sup>  | 52,1 <sup>0,000<br/>-0,300</sup>  | 1,85 | 12,5 | 50° | 1570                               | 2740    |
| LME 40OP-UU                                                                                 | 40                                            | 600                    | 62 <sup>0,000<br/>-0,013</sup>                  | 59   | 80 <sup>0,000<br/>-0,300</sup>  | 60,6 <sup>0,000<br/>-0,300</sup>  | 2,15 | 16,8 | 50° | 2160                               | 4020    |
| LME 50OP-UU                                                                                 | 50                                            | 970                    | 75 <sup>0,000<br/>-0,013</sup>                  | 72   | 100 <sup>0,000<br/>-0,300</sup> | 77,6 <sup>0,000<br/>-0,300</sup>  | 2,65 | 21,0 | 50° | 3820                               | 7940    |
| LME 60OP-UU                                                                                 | 60                                            | 1580                   | 90 <sup>0,000<br/>-0,015</sup>                  | 86,5 | 125 <sup>0,000<br/>-0,400</sup> | 101,7 <sup>0,000<br/>-0,400</sup> | 3,15 | 27,2 | 54° | 4700                               | 9800    |


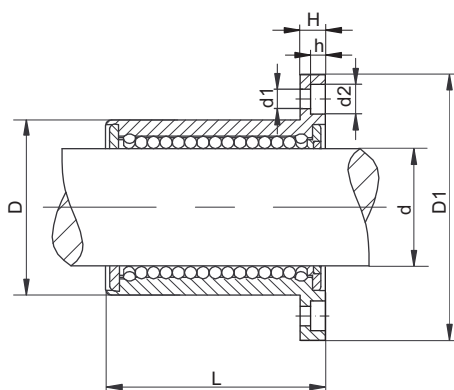
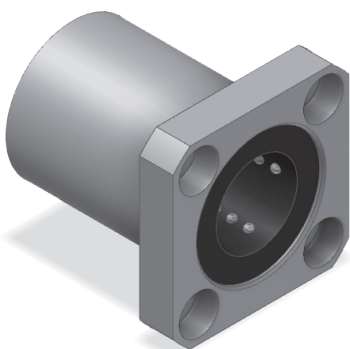
**KOMPAKTNE KROGLIČNE PUŠE TIP LMEK / COMPACT LINEAR BEARINGS TYPE LMEK**

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage |    | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |     |     |    |     |                |                |      |     | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|----|------------------------|-------------------------------------------------|-----|-----|----|-----|----------------|----------------|------|-----|------------------------------------|---------|
|                                                                                             |    |                        | D                                               | D1  | L   | H  | PCD | d <sub>1</sub> | d <sub>2</sub> | h    | K   | Dyn. C                             | Sta. C0 |
| LMEK 8-UU                                                                                   | 8  | 33                     | 16 <sup>+0,000</sup> <sub>-0,008</sub>          | 32  | 25  | 5  | 24  | 3,5            | 6              | 3,1  | 25  | 265                                | 402     |
| LMEK 12-UU                                                                                  | 12 | 64                     | 22 <sup>+0,000</sup> <sub>-0,009</sub>          | 42  | 32  | 6  | 32  | 4,5            | 7,5            | 4,1  | 32  | 510                                | 784     |
| LMEK 16-UU                                                                                  | 16 | 90                     | 26 <sup>+0,000</sup> <sub>-0,009</sub>          | 46  | 36  | 6  | 36  | 4,5            | 7,5            | 4,1  | 35  | 578                                | 892     |
| LMEK 20-UU                                                                                  | 20 | 147                    | 32 <sup>+0,000</sup> <sub>-0,011</sub>          | 54  | 45  | 8  | 43  | 5,5            | 9              | 5,1  | 42  | 862                                | 1370    |
| LMEK 25-UU                                                                                  | 25 | 295                    | 40 <sup>+0,000</sup> <sub>-0,011</sub>          | 62  | 58  | 8  | 51  | 5,5            | 9              | 5,1  | 50  | 980                                | 1570    |
| LMEK 30-UU                                                                                  | 30 | 465                    | 47 <sup>+0,000</sup> <sub>-0,011</sub>          | 76  | 68  | 10 | 62  | 6,6            | 11             | 6,1  | 60  | 1570                               | 2740    |
| LMEK 40-UU                                                                                  | 40 | 975                    | 62 <sup>+0,000</sup> <sub>-0,013</sub>          | 98  | 80  | 13 | 80  | 9              | 14             | 8,1  | 75  | 2160                               | 4020    |
| LMEK 50-UU                                                                                  | 50 | 1545                   | 75 <sup>+0,000</sup> <sub>-0,013</sub>          | 112 | 100 | 13 | 94  | 9              | 14             | 8,1  | 88  | 3820                               | 7940    |
| LMEK 60-UU                                                                                  | 60 | 2780                   | 90 <sup>+0,000</sup> <sub>-0,015</sub>          | 134 | 125 | 18 | 112 | 11             | 17             | 11,1 | 106 | 4700                               | 9800    |

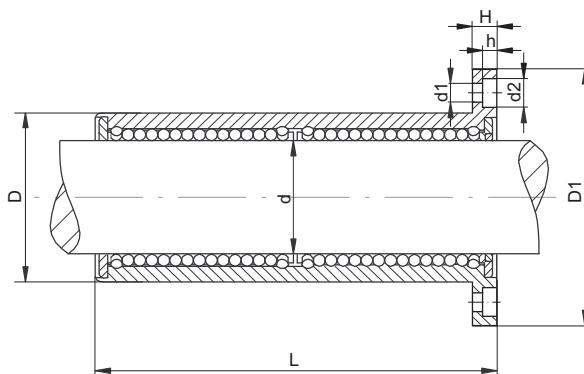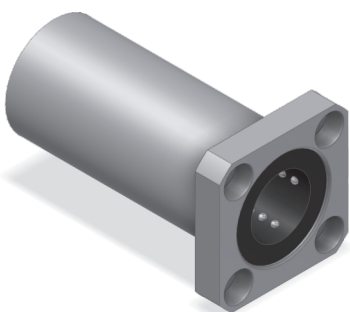**KOMPAKTNE KROGLIČNE PUŠE TIP LMEK-L / COMPACT LINEAR BEARINGS TYPE LMEK-L**

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | PREMER VODILA<br>SHAFT DIAMETER<br>d (mm) | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |     |     |    |     |                |                |      |     | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|-------------------------------------------|------------------------|-------------------------------------------------|-----|-----|----|-----|----------------|----------------|------|-----|------------------------------------|---------|
|                                                                                             |                                           |                        | D                                               | D1  | L   | H  | PCD | d <sub>1</sub> | d <sub>2</sub> | h    | K   | Dyn. C                             | Sta. C0 |
| LMEK 8L-UU                                                                                  | 8                                         | 51                     | 16 <sup>+0,000</sup> <sub>-0,008</sub>          | 32  | 45  | 5  | 24  | 3,5            | 6              | 3,1  | 25  | 421                                | 804     |
| LMEK 12L-UU                                                                                 | 12                                        | 90                     | 22 <sup>+0,000</sup> <sub>-0,009</sub>          | 42  | 61  | 6  | 32  | 4,5            | 7,5            | 4,1  | 32  | 813                                | 1570    |
| LMEK 16L-UU                                                                                 | 16                                        | 135                    | 26 <sup>+0,000</sup> <sub>-0,009</sub>          | 46  | 68  | 6  | 36  | 4,5            | 7,5            | 4,1  | 35  | 912                                | 1780    |
| LMEK 20L-UU                                                                                 | 20                                        | 225                    | 32 <sup>+0,000</sup> <sub>-0,011</sub>          | 54  | 80  | 8  | 43  | 5,5            | 9              | 5,1  | 42  | 1370                               | 2740    |
| LMEK 25L-UU                                                                                 | 25                                        | 500                    | 40 <sup>+0,000</sup> <sub>-0,011</sub>          | 62  | 112 | 8  | 51  | 5,5            | 9              | 5,1  | 50  | 1570                               | 3140    |
| LMEK 30L-UU                                                                                 | 30                                        | 720                    | 47 <sup>+0,000</sup> <sub>-0,011</sub>          | 76  | 123 | 10 | 62  | 6,6            | 11             | 6,1  | 60  | 2500                               | 5490    |
| LMEK 40L-UU                                                                                 | 40                                        | 1600                   | 62 <sup>+0,000</sup> <sub>-0,013</sub>          | 98  | 154 | 13 | 80  | 9              | 14             | 8,1  | 75  | 3430                               | 8040    |
| LMEK 50L-UU                                                                                 | 50                                        | 2620                   | 75 <sup>+0,000</sup> <sub>-0,013</sub>          | 112 | 192 | 13 | 94  | 9              | 14             | 8,1  | 88  | 6080                               | 15900   |
| LMEK 60L-UU                                                                                 | 60                                        | 4480                   | 90 <sup>+0,000</sup> <sub>-0,015</sub>          | 134 | 209 | 18 | 112 | 11             | 17             | 11,1 | 106 | 7550                               | 20000   |

## OHIŠJE TIP SCE / CASE UNIT TYPE SCE

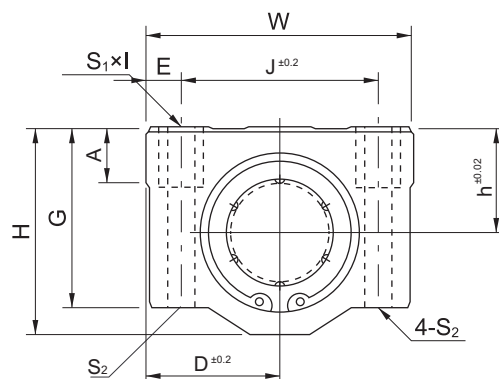




\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |    |    |     |      |      |    |     |     |                   |                |    | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|----|----|-----|------|------|----|-----|-----|-------------------|----------------|----|------------------------------------|---------|
|                                                                                             |                        | L                                               | h  | D  | W   | H    | G    | A  | J   | E   | S <sub>1</sub> xI | S <sub>2</sub> | K  | Dyn. C                             | Sta. C0 |
| SCE8-LME8UU                                                                                 | 80                     | 30                                              | 11 | 17 | 34  | 22   | 18   | 6  | 24  | 5   | M4x8              | 3,4            | 18 | 260                                | 400     |
| SCE12-LME12UU                                                                               | 118                    | 39                                              | 15 | 22 | 44  | 30   | 24   | 8  | 33  | 5,5 | M5x10             | 4,3            | 26 | 410                                | 590     |
| SCE16-LME16UU                                                                               | 180                    | 44                                              | 19 | 25 | 50  | 38,5 | 32,5 | 9  | 36  | 7   | M5x12             | 4,3            | 34 | 770                                | 1170    |
| SCE20-LME20UU                                                                               | 245                    | 53                                              | 21 | 27 | 54  | 41   | 35   | 11 | 40  | 7   | M6x12             | 5,2            | 40 | 860                                | 1370    |
| SCE25-LME25UU                                                                               | 550                    | 67                                              | 26 | 38 | 76  | 51,5 | 41   | 12 | 54  | 11  | M8x18             | 7,0            | 50 | 980                                | 1560    |
| SCE30-LME30UU                                                                               | 760                    | 76                                              | 30 | 39 | 78  | 59,5 | 49   | 15 | 58  | 10  | M8x18             | 7,0            | 58 | 1560                               | 2740    |
| SCE40-LME40UU                                                                               | 1700                   | 90                                              | 40 | 51 | 102 | 78   | 62   | 20 | 80  | 11  | M10x25            | 8,7            | 60 | 2150                               | 4010    |
| SCE50-LME50UU                                                                               | 2950                   | 110                                             | 52 | 61 | 122 | 102  | 80   | 25 | 100 | 11  | M10x25            | 8,7            | 80 | 3820                               | 7930    |

## OHIŠJE TIP SCE-W / CASE UNIT TYPE SCE-W

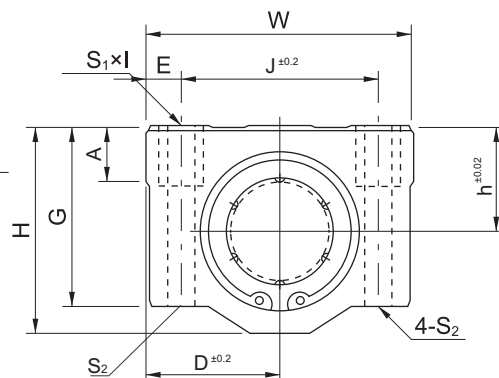
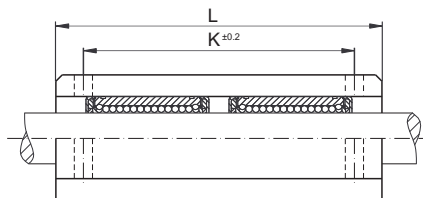



\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |    |    |     |      |      |    |     |     |                   |                |     | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|----|----|-----|------|------|----|-----|-----|-------------------|----------------|-----|------------------------------------|---------|
|                                                                                             |                        | L                                               | h  | D  | W   | H    | G    | A  | J   | E   | S <sub>1</sub> xI | S <sub>2</sub> | K   | Dyn. C                             | Sta. C0 |
| SCE8W-LME8UUx2                                                                              | 98                     | 58                                              | 11 | 17 | 34  | 22   | 18   | 6  | 24  | 5   | M4x8              | 3,4            | 42  | 410                                | 800     |
| SCE12W-LME12UUx2                                                                            | 232                    | 77                                              | 15 | 22 | 44  | 30   | 24   | 8  | 33  | 5,5 | M5x10             | 4,3            | 64  | 650                                | 1180    |
| SCE16W-LME16UUx2                                                                            | 360                    | 89                                              | 19 | 25 | 50  | 38,5 | 32,5 | 9  | 36  | 7   | M5x12             | 4,3            | 79  | 1230                               | 2340    |
| SCE20W-LME20UUx2                                                                            | 490                    | 106                                             | 21 | 27 | 54  | 41   | 35   | 11 | 40  | 7   | M6x12             | 5,2            | 90  | 1370                               | 2740    |
| SCE25W-LME25UUx2                                                                            | 1100                   | 136                                             | 26 | 38 | 76  | 51,5 | 41   | 12 | 54  | 11  | M8x18             | 7,0            | 119 | 1560                               | 3120    |
| SCE30W-LME30UUx2                                                                            | 1525                   | 154                                             | 30 | 39 | 78  | 59,5 | 49   | 15 | 58  | 10  | M8x18             | 7,0            | 132 | 2490                               | 5480    |
| SCE40W-LME40UUx2                                                                            | 3400                   | 180                                             | 40 | 51 | 102 | 78   | 62   | 20 | 80  | 11  | M10x25            | 8,7            | 150 | 3440                               | 8020    |
| SCE50W-LME50UUx2                                                                            | 5920                   | 230                                             | 52 | 61 | 122 | 102  | 80   | 25 | 100 | 11  | M10x25            | 8,7            | 200 | 6110                               | 15860   |

## OHIŠJE TIP SCE-S / CASE UNIT TYPE SCE-S

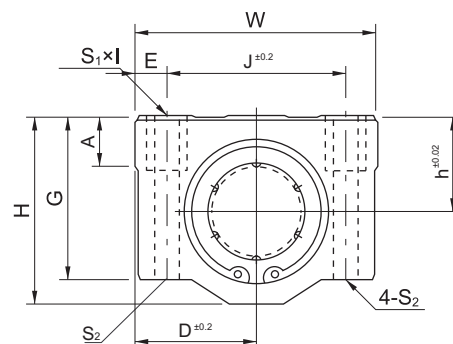




\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |    |    |     |      |      |    |     |     |                   |                |    | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|----|----|-----|------|------|----|-----|-----|-------------------|----------------|----|------------------------------------|---------|
|                                                                                             |                        | L                                               | h  | D  | W   | H    | G    | A  | J   | E   | S <sub>1</sub> xI | S <sub>2</sub> | K  | Dyn. C                             | Sta. C0 |
| SCE8S-LME8UU                                                                                | 40                     | 14,4                                            | 11 | 17 | 34  | 22   | 18   | 6  | 24  | 5   | M4x8              | 3,4            | 18 | 260                                | 400     |
| SCE12S-LME12UU                                                                              | 82                     | 20,3                                            | 15 | 22 | 44  | 30   | 24   | 8  | 33  | 5,5 | M5x10             | 4,3            | 26 | 410                                | 590     |
| SCE16S-LME16UU                                                                              | 122                    | 22,3                                            | 19 | 25 | 50  | 38,5 | 32,5 | 9  | 36  | 7   | M5x12             | 4,3            | 34 | 770                                | 1170    |
| SCE20S-LME20UU                                                                              | 176                    | 28,3                                            | 21 | 27 | 54  | 41   | 35   | 11 | 40  | 7   | M6x12             | 5,2            | 40 | 860                                | 1370    |
| SCE25S-LME25UU                                                                              | 400                    | 40,4                                            | 26 | 38 | 76  | 51,5 | 41   | 12 | 54  | 11  | M8x18             | 7,0            | 50 | 980                                | 1560    |
| SCE30S-LME30UU                                                                              | 570                    | 48,4                                            | 30 | 39 | 78  | 59,5 | 49   | 15 | 58  | 10  | M8x18             | 7,0            | 58 | 1560                               | 2740    |
| SCE40S-LME40UU                                                                              | 1320                   | 56,5                                            | 40 | 51 | 102 | 78   | 62   | 20 | 80  | 11  | M10x25            | 8,7            | 60 | 2150                               | 4010    |
| SCE50S-LME50UU                                                                              | 1900                   | 72,3                                            | 52 | 61 | 122 | 102  | 80   | 25 | 100 | 11  | M10x25            | 8,7            | 80 | 3820                               | 7930    |

## NASTAVLJIVO ALU - OHIŠJE TIP SCJ / ADJUSTABLE ALU - CASE UNIT TYPE SCJ

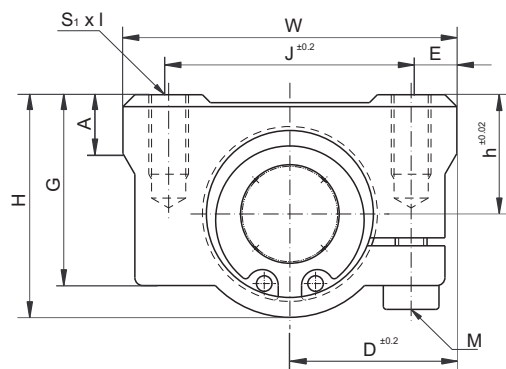




\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |    |    |     |      |      |     |      |      |                    |    |    | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|----|----|-----|------|------|-----|------|------|--------------------|----|----|------------------------------------|---------|
|                                                                                             |                        | L                                               | h  | D  | W   | H    | G    | A   | J    | E    | S <sub>1</sub> x l | M  | K  | Dyn. C                             | Sta. C0 |
| SCJ12-LM12UUAJ                                                                              | 112                    | 36                                              | 15 | 21 | 42  | 28   | 24   | 8,0 | 30,5 | 5,75 | M5x12              | M5 | 26 | 510                                | 784     |
| SCJ16-LM16UUAJ                                                                              | 189                    | 44                                              | 19 | 25 | 50  | 38,5 | 32,5 | 9,0 | 36   | 7    | M5x12              | M5 | 34 | 774                                | 1180    |
| SCJ20-LM20UUAJ                                                                              | 237                    | 50                                              | 21 | 27 | 54  | 41   | 35   | 11  | 40   | 7    | M6x12              | M5 | 40 | 882                                | 1370    |
| SCJ25-LM25UUAJ                                                                              | 555                    | 67                                              | 26 | 38 | 76  | 51,5 | 42   | 12  | 54   | 11   | M8x18              | M6 | 50 | 980                                | 1570    |
| SCJ30-LM30UUAJ                                                                              | 685                    | 72                                              | 30 | 39 | 78  | 59,5 | 49   | 15  | 58   | 10   | M8x18              | M6 | 58 | 1570                               | 2740    |
| SCJ40-LM40UUAJ                                                                              | 1600                   | 90                                              | 40 | 51 | 102 | 78   | 62   | 20  | 80   | 11   | M10x25             | M8 | 60 | 2160                               | 4020    |
| SCJ50-LM50UUAJ                                                                              | 3350                   | 110                                             | 52 | 61 | 122 | 102  | 80   | 25  | 100  | 11   | M10x25             | M8 | 80 | 3820                               | 7940    |

## ODPRTO ALUMINIJASTO OHIŠJE TIP SBR / OPEN ALUMINUM CASE UNIT TYPE SBR

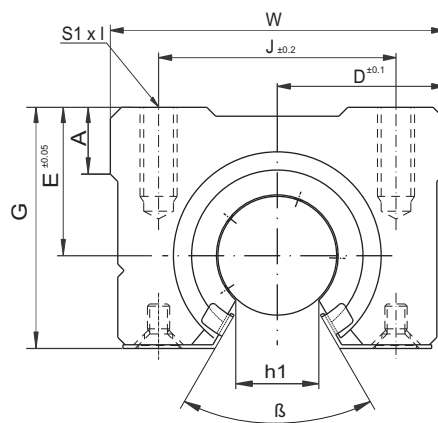




\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |                |      |     |     |    |    |    |    |                    |    |  | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|----------------|------|-----|-----|----|----|----|----|--------------------|----|--|------------------------------------|---------|
|                                                                                             |                        | L                                               | h <sub>1</sub> | D    | W   | β   | G  | A  | J  | E  | S <sub>1</sub> x l | K  |  | Dyn. C                             | Sta. C0 |
| SBR16-LM16UUOP                                                                              | 150                    | 45                                              | 10             | 22,5 | 45  | 80° | 33 | 9  | 32 | 20 | M5x12              | 30 |  | 770                                | 1170    |
| SBR20-LM20UUOP                                                                              | 200                    | 50                                              | 10             | 24   | 48  | 60° | 39 | 11 | 35 | 23 | M6x12              | 35 |  | 860                                | 1370    |
| SBR25-LM25UUOP                                                                              | 450                    | 65                                              | 11,5           | 30   | 60  | 50° | 47 | 14 | 40 | 27 | M6x12              | 40 |  | 980                                | 1560    |
| SBR30-LM30UUOP                                                                              | 630                    | 70                                              | 14             | 35   | 70  | 50° | 56 | 15 | 50 | 33 | M8x18              | 50 |  | 1560                               | 2740    |
| SBR40-LM40UUOP                                                                              | 1330                   | 90                                              | 19             | 45   | 90  | 50° | 72 | 20 | 65 | 42 | M10x20             | 65 |  | 2150                               | 4010    |
| SBR50-LM50UUOP                                                                              | 3000                   | 110                                             | 25             | 60   | 120 | 50° | 91 | 25 | 94 | 53 | M10x25             | 80 |  | 3820                               | 7930    |

## OHIŠJE TIP TBR / CASE UNIT TYPE TBR

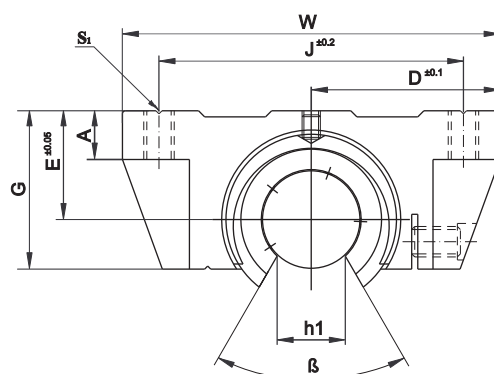

\* Aluminijasto ohišje

\* Aluminium case

| TIP / TYPE<br>z dvema dvojnimi tesnili<br>with 2 double lip seals<br>POM kletka<br>POM cage | TEŽA (g)<br>WEIGHT (g) | DIMENZIJE PUŠE / LINEAR BEARING DIMENSIONS (mm) |      |      |    |     |    |    |    |    |                   |    | NOSILNOST (N)<br>LOAD CAPACITY (N) |         |
|---------------------------------------------------------------------------------------------|------------------------|-------------------------------------------------|------|------|----|-----|----|----|----|----|-------------------|----|------------------------------------|---------|
|                                                                                             |                        | L                                               | h1   | D    | W  | β   | G  | A  | J  | E  | S <sub>1</sub> x4 | K  | Dyn. C                             | Sta. C0 |
| TBR16-LM16UUOP                                                                              | 180                    | 42                                              | 10   | 31   | 62 | 80° | 26 | 8  | 50 | 18 | M5                | 30 | 392                                | 490     |
| TBR20-LM20UUOP                                                                              | 300                    | 51                                              | 10   | 34   | 68 | 60° | 31 | 10 | 54 | 21 | M6                | 37 | 784                                | 1176    |
| TBR25-LM25UUOP                                                                              | 600                    | 65                                              | 11,5 | 41   | 82 | 50° | 41 | 12 | 65 | 28 | M8                | 50 | 1568                               | 2352    |
| TBR30-LM30UUOP                                                                              | 900                    | 75                                              | 14   | 45,5 | 91 | 50° | 48 | 12 | 75 | 34 | M8                | 60 | 1764                               | 2940    |