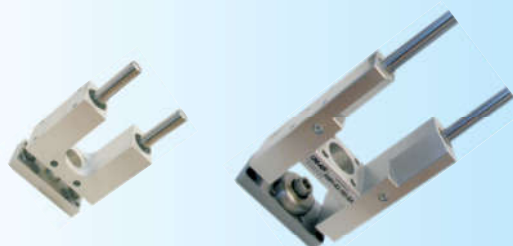


**CILINDRI
CYLINDERS**

1.000.0

**ENOTE ZA VODENJE
GUIDE UNITS**

2.000.0

**PRIJEMALA
GRIPPERS**

3.000.0

**VENTILI
VALVES**

4.000.0

**PRIPRAVA ZRAKA
AIR PREPARATION**

5.000.0

**PRIBOR
ACCESSORIES**

6.000.0


FILTER Serija F / AIR FILTER F Series

Vhodni tlak / Pressure in:

.....max. 20 bar s kovinskim lončkom / with metal bowl
max. 16 bar (12 bar z avtomatskim izpustom) / (12 bar with automatic drain)
min. 1,5 bar z avtomatskim izpustom / with automatic drain

Temperatura okolice vgradnje / Ambient temperature

.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min F	Pretok l/min Flow l/min FV	Pretok l/min Flow l/min FX	Pretok l/min Flow l/min FA	B	C	D
F/FV/FX/FA	00	G1/8	1000	130	230	310	40	12,3	102,5
F/FV/FX/FA	01	G1/4	1000	160	450	380	40	12,3	102,5
F/FV/FX/FA	11	G1/4	2100	160	280	380	48	27,5	128,5
F	12	G3/8	2100	xxx	xxx	xxx	48	27,5	128,5
F/FV/FX/FA	33	G1/2	4000	500	720	1500	69,6	34,5	152
F	34	G3/4	4000	xxx	xxx	xxx	69,6	34,5	152
F	55	G 1	8000	xxx	xxx	xxx	100	52	257

PRIMER NAROČANJA / HOW TO ORDER:

Oznaka za kvaliteto filtra / Code for filter quality

F.....filter < 5 µm , FV.....filter < 0,3 µm , FX.....filter < 0,1 µm
 FA.....filter z aktivnim ogljem / Active Carbon Filter

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcija / Option

H.....kovinski lonček z nivokazom / Metal bowl with level indicator
 (MOŽNOST LE OD VELIKOSTI VKLJUČNO 11 DO 55 /
 OPTION ONLY FOR SIZE 11 TO 55)

Opcija / Option

AM.....avtomatski izpust / Auto drain

F. 11. H. AM



H

Pritrdilne elemente je pri naročilu potrebno navesti posebej!

Fixating components should be ordered separately!




ZW

REGULATOR TLAKA Serija R / PRESSURE REGULATOR R Series

Vhodni tlak / Pressure in.....max. 16 bar
 Izhodni tlak / Pressure out.....0,5 - 10 bar (Standard)
 Temperatura okolice vgradnje / Ambient temperature max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
R	00	G1/8	1100	40	62,4	22
R	01	G1/4	1100	40	62,4	22
R	11	G1/4	1500	48	67	27
R	12	G3/8	1500	48	67	27
R	22	G3/8	3200	58	86,6	26,8
R	33	G1/2	6000	69,6	97	35,5
R	34	G3/4	6000	69,6	97	35,5
R	55	G 1	12500	100	128	51,5



PRIMER NAROČANJA / HOW TO ORDER:

Regulator / Regulator Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije / Options

0,1 - 3 bar.....območje od / pressure range
 0,2 - 6 bar.....območje od / pressure range
 **0,5 - 16 bar... območje od / pressure range

**Opcija samo za tip R.11 do R.55 / Options only for Typ R.11 to R.55

R. 00. 0,13

Pritrdilne elemente je pri naročilu potrebno navesti posebej!

Fixating components should be ordered separately!



MW



ZW

FILTER Serija DF / FILTER DF Series

Vhodni tlak / Pressure in:


.....max. 16 bar,
min. 1,5 bar (s pol in avtomatskim izpustom / with semi and auto drain)
max. 25 bar (s kovinskim lončkom / with metal bowl)



Izhodni tlak / Pressure out:.....0,5 - 10 bar (Standard)
 Temp. okolice vgradnje / Ambient temperature.....max. 60° C



Standard



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min
DF	56	G1 1/4	12500
DF	57	G1 1/2	12500

PRIMER NAROČANJA / HOW TO ORDER:

DF. 56. 40. M. AM

Filter / Filter Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Velikost por / Pore size

40 µm
 8 µm

Opcije1 / Options1

M.....kovinski lonček z nivokazom / metal bowl with level indicator
 B.....zaščitna košara / bowl guard

Opcija2 / Option2

AM.....avtomatski izpust / auto drain

HA.....polavtomatski izpust / semiauto drain

FILTER Serija DF / FILTER DF Series

Vhodni tlak / Pressure in:


.....max. 16 bar,
min. 1,5 bar (s pol in avtomatskim izpustom / with semi and auto drain)
max. 25 bar (s kovinskim lončkom / with metal bowl)



Izhodni tlak / Pressure out:.....0,5 - 10 bar (Standard)
 Temp. okolice vgradnje / Ambient temperature.....max. 60° C



Standard



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min
DF	86	G1 1/4	30000
DF	87	G1 1/2	30000
DF	88	G2	30000

PRIMER NAROČANJA / HOW TO ORDER:

DF. 86. 60. M. AM

Filter / Filter Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Velikost por / Pore size

60 µm
 8 µm

Opcije1 / Options1

M.....kovinski lonček z nivokazom / metal bowl with level indicator
 B.....zaščitna košara / bowl guard


Opcija2 / Option2

AM.....avtomatski izpust / auto drain

HA.....polavtomatski izpust / semiauto drain

REGULATOR TLAKA Serija DR / PRESSURE REGULATOR DR Series

Vhodni tlak / Pressure in.....max. 28 bar
 Izhodni tlak / Pressure out.....0,15 - 7 bar (Standard)
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj Thread	Pretok l/min Flow l/min
DR	022-00	G1/8	350
DR	022-01	G1/4	350

PRIMER NAROČANJA / HOW TO ORDER:

DR. 022-01. 0,13,5

Regulator / Regulator Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije / Options

0,1 - 3,5 bar...območje od / pressure range
 0,5 - 10 bar...območje od / pressure range

Pritrdilne elemente je pri naročilu potrebno navesti posebej!


Fixating components should be ordered separately!



MW

PRECIZNI REG. TLAKA Serija FDR / PRECISE PRESSURE REGULATOR FDR Series

Vhodni tlak / Pressure in.....max. 16 bar
 Izhodni tlak / Pressure out.....0,05 - 2 bar, 0,05 - 4 bar, 0,05 - 7 bar
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
FDR	02	G1/4	900	/	/	/

PRIMER NAROČANJA / HOW TO ORDER:

FDR. 02. 0,052

Regulator / Regulator Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Območje / Range

0,05 2 bar...območje od / pressure range
 0,05 4 bar...območje od / pressure range
 0,05 7 bar...območje od / pressure range

Pritrdilne elemente je pri naročilu potrebno navesti posebej!


Fixating components should be ordered separately!




ZW

POČASNO OZRAČEVALNI VENTIL Serija A / STARTING VALVE A Series

Vhodni tlak / Pressure in.....max. 16 bar , min. 2,5 bar
 Izhodni tlak / Pressure out.....50 % vhodnega tlaka / 50 % of Pressure in
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
A	01	G1/4	1600	45	48,5	29
A	11	G1/4	1000	48	28	28
A	33	G1/2	4000	69,6	36,5	36,5
A	55	G 1	12000	100	51,8	51,8



PRIMER NAROČANJA / HOW TO ORDER:

Ventil / Typ of Valve

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table


A. 01

VMESNIK RAZDELILEC Serija Z / DISTRIBUTOR Z Series

Vhodni tlak / Pressure in.....max. 16 bar , s tlačnim stikalom / with pressure switch: 0,58 bar
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj C Thread C	Pretok l/min Flow l/min	B	D
Z	01	G1/4	2700	23	36
Z	11	G1/4	3300	35	52
Z	33	G1/2	11000	39,6	67
Z	55	G 1	25000	60	102



PRIMER NAROČANJA / HOW TO ORDER:

Regulator / Regulator Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table



Opcije / Options

U.....pnevmatsko stikalo / pneumatic switch

Z. 01. U

FILTER REGULATOR Serija C / FILTER REGULATOR C Series

Vhodni tlak / Pressure in max. 16 bar, min. 1,5 bar
 Izhodni tlak / Pressure out 0,5 - 10 bar (Standard)
 Filter.....5µm
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
C	00	G1/8	950	40	62,4	102,5
C	01	G1/4	950	40	62,4	102,5
C	11	G1/4	1400	48	67,2	129
C	12	G3/8	1400	48	67,2	129
C	22	G3/8	2300	58	87	134
C	33	G1/2	3500	69,6	97	150,5
C	34	G3/4	3500	69,6	97	150,5
C	55	G 1	12000	100	128	257

PRIMER NAROČANJA / HOW TO ORDER:

Filterregulator / Filter Regulator Type

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije1 / Options1

H.....kovinski lonček z nivokazom / Metal bowl with level indicator
 AM.....avtomatski izpust / Auto drain

Opcije2 / Options2

0,1 - 3 bar.....območje od / pressure range
 0,2 - 6 bar.....območje od / pressure range
 0,5 - 16 bar...območje od / pressure range

C. 01. H. 0,13

Pritrdilne elemente je pri naročilu potrebno navesti posebej!

Fixating components should be ordered separately!



H




MW



ZW

OLJNIK Serija L / LUBRICATOR L Series

Vhodni tlak / Pressure in max. 16 bar, s kovinskim lončkom / with metal bowl: max. 20 bar
 Tip olja / Oil type.....HL 25 po DIN 51524 ISO VG 32
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
L	11	G1/4	1900	48	58	109
L	12	G3/8	1900	48	58	109
L	33	G1/2	5000	69,6	65	132
L	34	G3/4	5000	69,6	65	132
L	55	G 1	18000	100	84	236

PRIMER NAROČANJA / HOW TO ORDER:

Oljnik / Type of Lubricator

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije / Options

H.....kovinski lonček z nivokazom / Metal bowl with level indicator
 AM.....avtomatski izpust / Auto drain

L. 11 . H

Pritrdilne elemente je pri naročilu potrebno navesti posebej !

Fixating components should be ordered separately!



H




ZW

ENOTA ZA PRIPRAVO ZRAKA Serija CL / AIR PREPARATION UNIT CL Series

Vhodni tlak / Pressure in.....max. 16 bar (z avtomatskim izpustom / with auto drain: min. 1,5 bar)
 Izhodni tlak / Pressure out.....0,5 - 10 bar (Standard)
 Filter:.....5µm (Standard)
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
CL	11	G1/4	1100	93	67	129
CL	12	G3/8	1100	93	67	129
CL	33	G1/2	3500	135,6	97	150,5
CL	34	G3/4	3500	135,6	97	150,5
CL	55	G 1	10500	200	128	257

**PRIMER NAROČANJA / HOW TO ORDER:**

Enota / Type of Unit

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije1 / Options1

H.....kovinski lonček z nivokazom / Metal bowl with level indicator
AM.....avtomatski izpust / Auto drain

Opcije2 / Options2

0,1 - 3 bar.....območje od / pressure range
0,2 - 6 bar.....območje od / pressure range
0,5 - 16 bar.....območje od / pressure range**CL. 11. H. 0,13**

Pritrdilne elemente je pri naročilu potrebno navesti posebej!

Fixating components should be ordered separately!



H



MW




ZW

ENOTA ZA PRIPRAVO ZRAKA Serija FRL / AIR PREPARATING UNIT FRL Series

Vhodni tlak / Pressure in.....max. 16 bar (z avtomatskim izpustom / with auto drain: min. 1,5 bar)
 Izhodni tlak / Pressure out.....0,5 - 10 bar (Standard)
 Filter:.....5µm (Standard)
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
FRL	11	G1/4	1100	138	67	129
FRL	12	G3/8	1100	138	67	129
FRL	33	G1/2	3000	201,6	99,5	152
FRL	34	G3/4	3000	201,6	99,5	152
FRL	55	G 1	11300	300	128	257

**PRIMER NAROČANJA / HOW TO ORDER:**

Enota / Type of Unit

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije1 / Options1

H.....kovinski lonček z nivokazom / Metal bowl with level indicator
AM.....avtomatski izpust / Auto drain

Opcije2 / Options2

0,1 - 3 bar.....območje od / pressure range
0,2 - 6 bar.....območje od / pressure range
0,5 - 16 bar.....območje od / pressure range**FRL. 11. H. 0,13**

Pritrdilne elemente je pri naročilu potrebno navesti posebej!

Fixating components should be ordered separately!



H




MW




ZW

3/2 ELEKTRIČNO KRMILJENI VENTIL Serija S / 3/2 SOLENOID ACTUATED VALVE S Series

Vhodni tlak / Pressure in.....max. 10 bar, min. 2 bar
 Izhodni tlak / Pressure out.....0,15 - 7 bar (Standard)
 Napetost / voltage.....24 V = ; 48 V 50/60 Hz IP 65 (P 54)
 Temperatura okolice vgradnje / Ambient temperature.....max. 50° C



Tip Type	Velikost Size Code	Navoj A Thread A	Pretok l/min Flow l/min	B	C	D
S	01	G1/4	1600	45	96	29
S	11	G1/4	900	48	95	44
S	33	G1/2	4000	69,6	107,5	75,5
S	55	G 1	12500	100	103,5	93



PRIMER NAROČANJA / HOW TO ORDER:


Ventil / Type of Valve

Velikost / Size Code

oznake iz zgornje tabele / Codes from the upper table

Opcije / Options

Z...zunanje krmiljenje / external control
 I...pnevmatsko krmiljenje / pneumatic control



S. 01 . Z

Pri naročilu navedite tip elektromagneta in pritrdilni element ventila!

Solenoid coils and fixing component should be ordered separately!



ZW

Tip
Type

S.1119	220V/50Hz
S.1129	110V/50Hz
S.1130	24V/50Hz

MEMBRANSKA TLAČNA STIKALA PE / MEMBRANE PRESSURE SWITCHES PE


S4310



S4230





S4130 / S4110



	S4310	S4230	S4110	S4130
Medij / Medium	zrak, neagresivni plini in tekočine air, nonaggressive gases and fluids		zrak air	
Temperatura / Temperature	-10° +80°	-10° +80°	-20° +80°	-20° +80°
Delovni tlak / Working pressure	1 - 16 bar	1 - 10 bar	1 - 8 bar	1 - 10 bar
Max. tlak / Max. pressure	80 bar	80 bar	15 bar	15 bar
Preklopna dif. / Switching diff.	4% -10%	4% -10%	10% -15%	10% -15%
Kontakt / Contact	1NO /1NC	1NO /1NC	1NC 1NO	1NC 1NO
Napetost / Voltage	max. 250V	max. 250V	max. 250V	max. 250V
Tok / Current	5A	5A	0,5A	0,5A
Zaščita / Protection	IP65	IP65	IP 65	IP 65
Pritrditev / Mounting	Prirobnica / Flange	G 1/4	G 1/8	G 1/4

ELEKTR. TLAČNO STIKALO Tip PKEP1 / ELECTRONIC PRESSURE SWITCH Type PKEP1

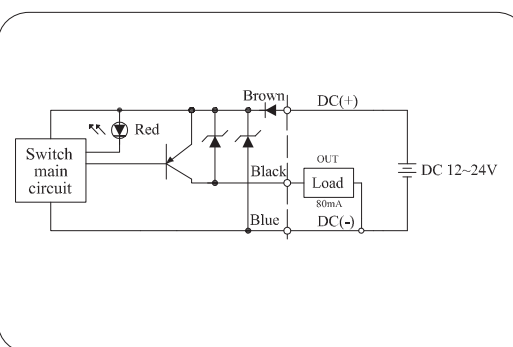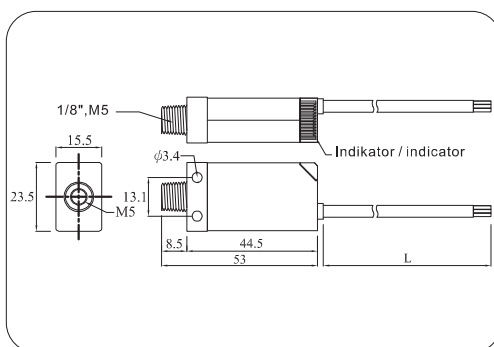

Območje delovnega tlaka / Operating pressure range.....	1 - 0 bar, 0 - 1 bar, 0 - 10 bar
Max. tlak / Max. pressure.....	5 bar, verzija / version 0 10 bar Pmax = 15 bar
Medij / Medium.....	zrak, neagresivni, negorljivi plini / air, noncorrosive, nonflammable gases
Napajanja / Power supply voltage.....	12 - 24V DC $\pm 10\%$, nihanje / ripple max. 10%
Odzivni čas / Response time.....	5 ms
Ponovljivost / Repeatability.....	$\pm 1\%$
Tok / Current consumption.....	1 izhod / 1 output: max. 21 mA, 2 izhoda / 2 outputs: max. 25 mA
Zaščitni razred / Enclosure.....	IP40
Temperatura okolice / Ambient temperature.....	0 50° C
Dovoljena vlažnost / Ambient humidity range.....	35 85%
Prebojna napetost / Withstand voltage.....	1000 VAC v 1 min (med ohišjem in vodnikom / between case and lead wire)
Izolativna upornost / Insulation resistance.....	min. 50 MOhm (pri / at 500 VDC (med ohišjem in vodnikom / between case and lead wire))
Vibracije / Vibration.....	max. amplituda / amplitude 1,5 mm, v območju / in range of 10 Hz, 55 Hz, 10 Hz v / in 1 min dve uri v vsako od X, Y, Z smeri / two hours in each direction of X, Y, Z
Udar / Shock.....	980 m/s ² (100G), 3 krat vsak v smereh X, Y, Z / 3 times each in direction of X, Y, Z
Temperaturna karakteristika / Temperature characteristic.....	$\pm 3\%$ (standard: 25° C)
Navoj priklopa / Port size.....	G1/8, M5
Teža / Weight.....	50 g (skupaj z 1 m vodnika, including 1 m lead wires)
Tip izhoda / Output type.....	PNPNO
Histereza / Hysteresis.....	nastavljiva v območju / adjustable in range of 1-10%
Točke nastavljanja / Setting points.....	1 točka / 1 point
Indikacijska lučka delovanja / Operation indicating lamp.....	gori pri vklopljenem (rdeča) / light at ON (red)

KODA NAROČANJA / ORDER CODE:

PKEP1. 1 .02

Stikalo / Type of switch

Območje delovanja / Operating range



- 1.....1 - 0 bar
 2.....0 - 1 bar
 3.....0 - 10 bar

ELEKTR. TLAČNO STIKALO Tip PKEP / ELECTRONIC PRESSURE SWITCH Type PKEP

PKEP



IP 40

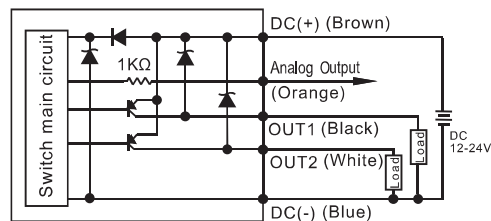

Nominalno območje tlaka / <i>Rated pressure range</i>	KP20C 1 - 1 bar	KP20V 1 - 0 bar	KP20P 0 - 10 bar
Delovni/nastavni tlak / <i>Operating/Setting pressure range</i>	1 - 1 bar	1 - 0,1 bar	0,001 - 10 bar
Max. tlak / <i>Max. pressure</i>	5 bar	5 bar	15 bar
Medij / <i>Medium</i>	zrak, neagresivni, negorljivi plini / <i>air, noncorrosive, nonflammable gases</i>		
Resolucija nastavitve tlaka / <i>Set pressure resolution</i>	kPa 0,1	0,1	/
	Mpa /	/	0,001
	kgf/cm ² 0,001	0,001	0,01
	bar 0,001	0,001	0,01
	psi 0,02	0,01	0,1
	mmHg 1	1	/
	inHg 0,1	0,1	/
Napajanje / <i>Power supply voltage</i>	12 - 24 V DC $\pm 10\%$, nihanje / <i>ripple max. 10%</i>		
Tok / <i>Current consumption</i>	55 mA ali manj / <i>55 mA or less</i>		
Električni izhod / <i>Switch output</i>	PNP 2 izhoda / <i>PNP 2 outputs</i> max. tok 80 mA / <i>max. load current 80 mA</i> max. napajalna napetost 30 VDC / <i>max supply voltage 30 VDC</i> remanentna napetost ≤ 1 V / <i>residual voltage ≤ 1 V</i>		
Ponovljivost / <i>Repeatability</i>	$\leq \pm 0,2\%$, ± 1 digit / <i>digit</i>		
Histereza / <i>Hysteresis</i>	Histerezni način / <i>Hysteresis mode</i> nastavljiva / <i>adjustable</i> Primerjalno okno / <i>Window comparator mode</i> fiksna (3 digiti) / <i>fixed (3 digits)</i>		
Odzivni čas / <i>Response time</i>	$\leq 2,5$ ms (čas vzorčenja / <i>chatteringproof function 24 ms, 192 ms, 768 ms</i>)		
Zaščita / <i>Protection circuit</i>	zaščita proti kratkemu stiku / <i>short circuit protection</i>		
7 segmentni LED prikazovalnik / <i>7 segment LED display</i> ...	3 1/2 številčni / <i>digit (frekvenca osveževanja / <i>sampling rate 5/sek</i>)</i>		
Točnost indikatorja / <i>Indicator accuracy</i>	$\leq \pm 2\%$, ± 1 digit / <i>digit (pri temperaturi / <i>ambient temperature 25$\pm 3^\circ$ C</i>)</i>		
Indikator / <i>Indicator</i>	zelena / <i>green LED (OUT1), rdeča / <i>red LED (OUT2)</i></i>		
Analogni izhod / <i>Analog output</i>	izhodna napetost / <i>output voltage</i> 1 5V $\pm 5\%$ 1 5V $\pm 2,5\%$ 1 5V $\pm 2,5\%$ linearnost / <i>linearity</i> $\leq \pm 1\%$ $\leq \pm 1\%$ $\leq \pm 1\%$		
Zaščitni razred / <i>Enclosure</i>	IP40		
Temperatura okolice / <i>Ambient temperature</i>	0 50° C		
Dovoljena vlažnost / <i>Ambient humidity range</i>	35 85%		
Prebojna napetost / <i>Withstand voltage</i>	1000 VAC v 1 min (med ohišjem in vodnikom / <i>between case and lead wire</i>)		
Izolativna upornost / <i>Insulation resistance</i>	min. 50 MOhm (pri / <i>at 500VDC (med ohišjem in vodnikom / <i>between case and lead wire</i>)</i>		
Vibracije / <i>Vibration</i>	max. amplituda / <i>max. amplitude 1,5 mm, v območju / <i>in range of 10 Hz55 Hz 10Hz v / <i>in 1 min, dve uri v vsako od X, Y, Z smeri / <i>two hours in each direction of X, Y, Z</i></i></i></i>		
Udar / <i>Shock</i>	980 m/s ² (100G), 3 krat vsak v smereh X, Y, Z / <i>3 times in each direction of X, Y, Z</i>		
Temperaturna karakteristika / <i>Temperature characteristic</i> ...	$\leq \pm 2\%$ (standard: 25° C)		
Navoj priklopa / <i>Port size</i>	G1/8		
Priključni vodnik / <i>Lead wire</i>	5-žilni kabel / <i>5-conductor cable (0,15 mm²)</i>		
Teža / <i>Weight</i>	135 g (skupaj z 2 m vodnika, including 2m lead wire)		

KODA NAROČANJA / ORDER CODE:

Stikalo / Type of switch

Območje delovanja / Operating range

C.....1 - 1 bar

V.....1 - 0 bar

P.....0 - 10 bar

Vgradni elementi / Mounting elements

A.....vgradni nosilec / *mounting bracket*

B.....adapter za ploščo / *panel adapter*

C.....adapter za ploščo z zaščitnim pokrovčkom / *panel adapter with front protective lid*

Vgradni nosilec / *mounting bracket*

Vgradni nosilec / *mounting bracket*

adapter za ploščo / *panel adapter*

adapter za ploščo / *panel adapter*

36x36 $\pm 0,3$ mm

t $\leq 4,5$ mm

MOŽNOST VGRADNJE NA PRIPRAVNE ENOTE MOUNTING OPTION ON AIR PREPARATION UNITS

