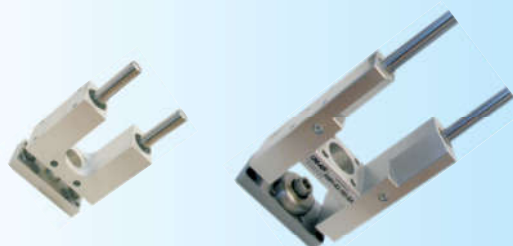


**CILINDRI
CYLINDERS**

1.000.0

**ENOTE ZA VODENJE
GUIDE UNITS**

2.000.0

**PRIJEMALA
GRIPPERS**

3.000.0

**VENTILI
VALVES**

4.000.0

**PRIPRAVA ZRAKA
AIR PREPARATION**

5.000.0

**PRIBOR
ACCESSORIES**

6.000.0

ENOTA ZA VODENJE AMC / GUIDE UNIT AMC

Tehnični podatki / Technical data

Temperatura / Temperature
max. 70° C

Material / Material

Telo / Body: aluminij / aluminum
Vodila / Guides: 1,1213 / 6264 HRc
Brisalci / Wipers: PU



ZA CILINDRE ISO 6432
FOR CYLINDERS ISO 6432

NAROČNIŠKA KODA / ORDER CODE:

AMC

NAZIVNI PREMER / DIAMETER


8, 10, 12, 16

HOD / STROKE


OPCIJA / OPTION

BA Z drsnimi vodili
With slide bushes
BB S krogličnimi pušami
With ball bushes



DOVOLJENA OBREMENTEV PERMISSIBLE LOAD



BA Z drsnimi vodili
With slide bushes

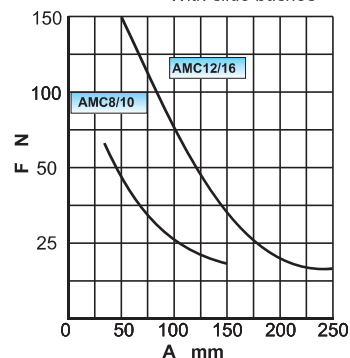

BB S krogličnimi pušami
With ball bushes

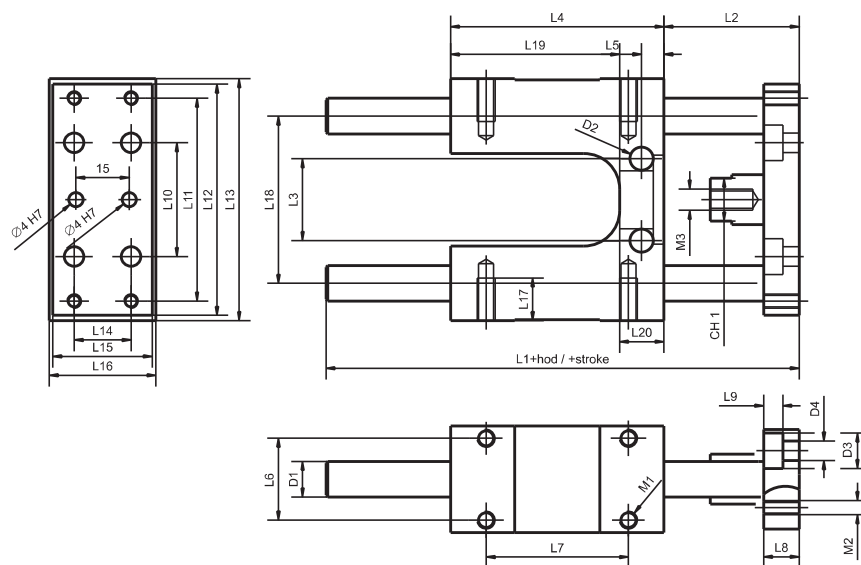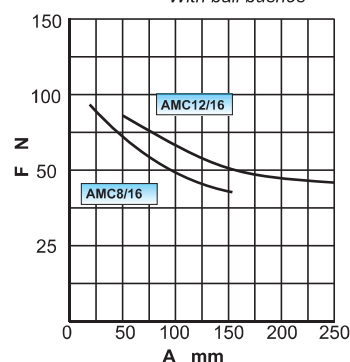

Ø	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20	ØD1	ØD2	ØD3	ØD4	M1	M2	M3	CH	CH
8	86	31	25	48	6	21	25	8	5.7	25	42	64	67	16	26	29	10	48	41	7	8	5.5	10	5.5	M5	M5	M4	9	9
10	86	31	25	48	6	21	25	8	5.7	25	42	64	67	16	26	29	10	48	41	7	8	5.5	10	5.5	M5	M5	M4	9	9
12	108	38	23	60	6.5	23	40	10	5.7	32	57	65	68	16	28	30	12	47	47	13	10	5.5	10	5.5	M5	M5	M6	12	12
16	108	38	23	60	6.5	23	40	10	5.7	32	57	65	68	16	28	30	12	47	47	13	10	5.5	10	5.5	M5	M4	M6	12	12

Ø Teža (hod = 0mm)
Weight (stroke = 0mm)

Ø	Teža (hod = 0mm) Weight (stroke = 0mm)	Teža vsakih 10mm Weight per every 10mm
8	332	10
10	332	10
12	490	13
16	490	13

ENOTA ZA VODENJE AMH / GUIDE UNIT AMH

ZA CILINDRE ISO 6432
FOR CYLINDERS ISO 6432




Tehnični podatki / Technical data


Temperatura / Temperature
max. 70° C

Material / Material


Telo / Body aluminij/ aluminum
Vodila / Guides 1.1213 / 6264 HRc
Brisalci / Wipers PU



BA Z drsnimi vodili
With slide bushes

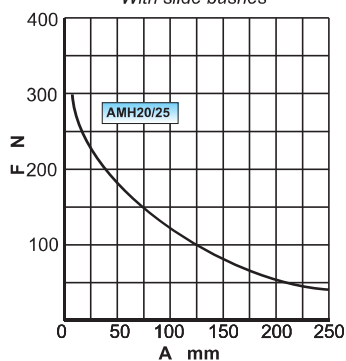

BB S krogličnimi pušami
With ball bushes

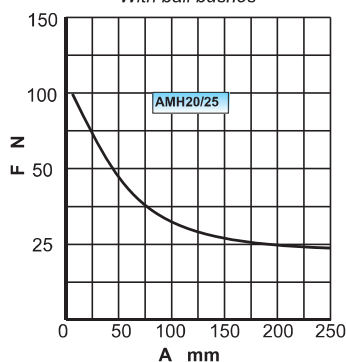

NAROČNIŠKA KODA / ORDER CODE:


NAZIVNI PREMER / DIAMETER
20, 25

HOD / STROKE

OPCIJA / OPTION

BA Z drsnimi vodili
With slide bushes
BB S krogličnimi pušami
With ball bushes

AMH

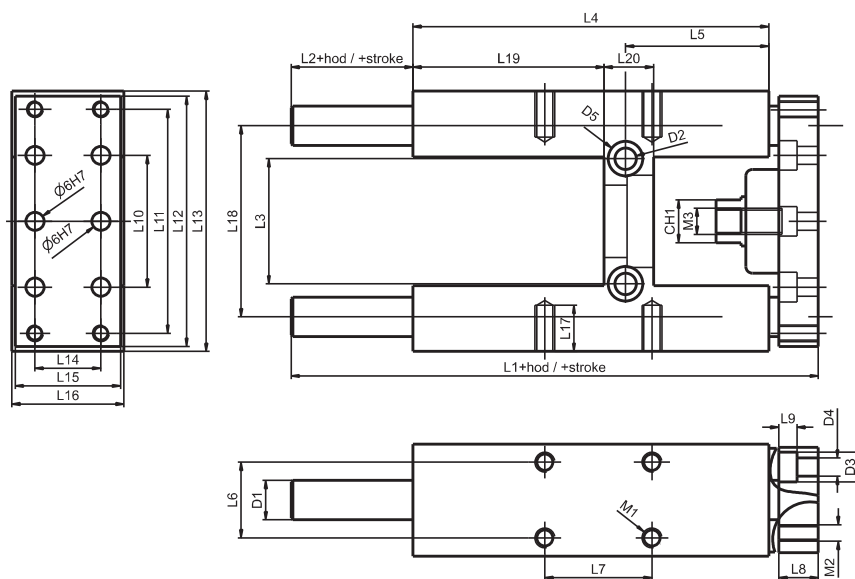

Ø	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20	ØD1	ØD2	ØD3	ØD4	M1	M2	M3	CH
20	160	37	38	108	41.5	23	32.5	12	6	40	68	76	79	20	32	34	14	58	58	15	12	6.5	9	5.5	M 6	M 5	M 8	13
25	160	37	38	108	41.5	23	32.5	12	6	40	68	76	79	20	32	34	14	58	58	15	12	6.5	9	5.5	M 6	M 5	M 10x1.25	13

Ø Teža (hod = 0mm)
Weight (stroke = 0mm)

Teža vsakih 10mm
Weight per every 10mm

20	873	13
25	866	13

ENOTA ZA VODENJE AMH / GUIDE UNIT AMH

Tehnični podatki / Technical data

Temperatura / Temperature
max. 70° C

Material / Material

Telo / Body: aluminij / aluminum
Vodila / Guides: 1,1213 / 6264 HRc
Brisalci / Wipers: PU



ZA CILINDRE VDMA 24562, ISO 6431
FOR CYLINDERS VDMA 24562, ISO 6431

NAROČNIŠKA KODA / ORDER CODE:

AMH

NAZIVNI PREMER / DIAMETER


32, 40, 50, 63, 80, 100

HOD / STROKE


OPCIJA / OPTION

BA Z drsnimi vodili
With slide bushes
BB S krogličnimi pušami
With ball bushes



DOVOLJENA OBREMENTEV PERMISSIBLE LOAD



BA Z drsnimi vodili
With slide bushes

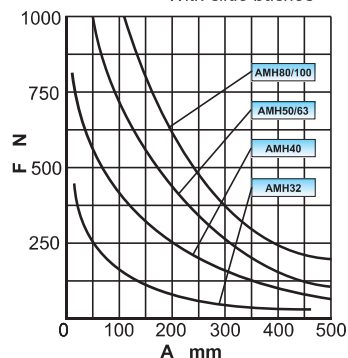

BB S krogličnimi pušami
With ball bushes

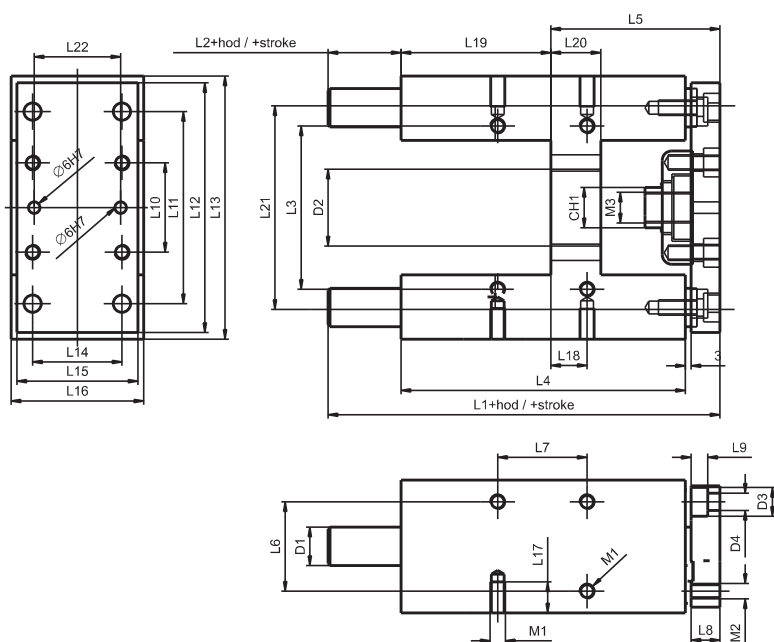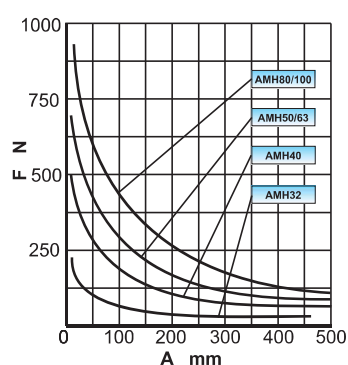

Ř	L1	L2	L3	L4	L5	L6	L7	L8	L9	L10	L11	L12	L13	L14	L15	L16	L17	L18	L19	L20	L21	ØD1	ØD2	ØD3	ØD4	M1	M2	M3	CH1
32	177	37	61	125	64	32.5	32.5	12	6.5	32.5	78	90	97	32.5	45	49	12	4.3	76	17	74	12	30	10.5	6.5	M6	M6	M10x1.25	15
40	192	37	69	139	74	38	38	15	6.5	38	84	110	115	38	54	58	14	11	81	21	87	16	35	10.5	6.5	M6	M6	M12x1.25	15
50	205	38	85	148	89	46.5	46.5	15	9	46.5	100	130	137	46.5	63	69	16	18.8	78	26	104	20	40	13.5	8.5	M8	M8	M16x1.5	22
63	237	37	100	182	88	56.5	56.5	15	9	56.5	105	145	152	56.5	79	85	16	15.3	111	26	119	20	45	13.5	8.5	M8	M8	M16x1.5	22
80	280	42	130	215	110	72	72	20	11	72	130	180	189	72	99	105	20	21	128	34	148	25	45	18	11	M10	M10	M20x1.5	27
100	280	37	150	220	115	89	89	20	11	89	150	200	213	89	120	129	20	24.5	128	39	172	25	55	18	11	M10	M10	M20x1.5	27

R Teža (hod = 0mm)
Weight (stroke = 0mm)

Teža vsakih 10mm
Weight per every 10mm

32	1,57	17
40	2,48	31
50	4,18	47

R Teža (hod = 0mm)
Weight (stroke = 0mm)

Teža vsakih 10mm
Weight per every 10mm

63	5,54	45
80	10,72	70
100	13,42	70